

Sem

Tolo


Fiori




Bianco




Ivory

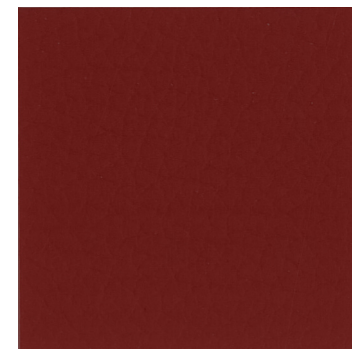


Red

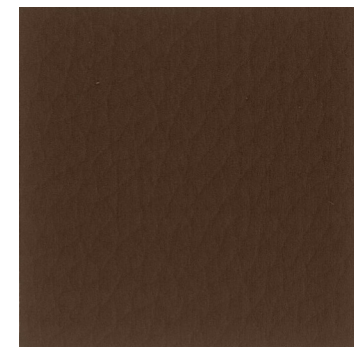

Espresso

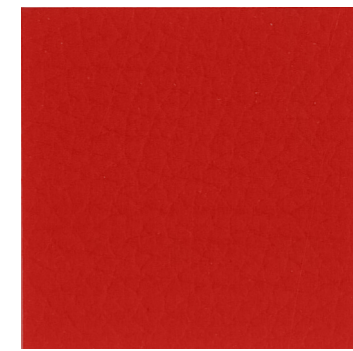

Ferrari

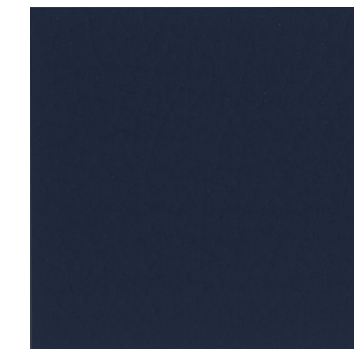

Kobalt



100



468




222



Brown




Cognac

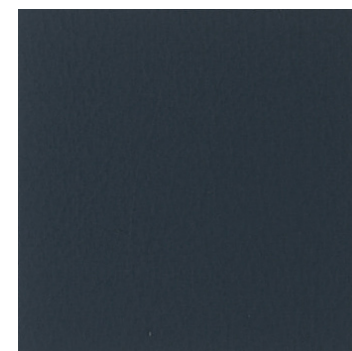

Kobalt




Nero

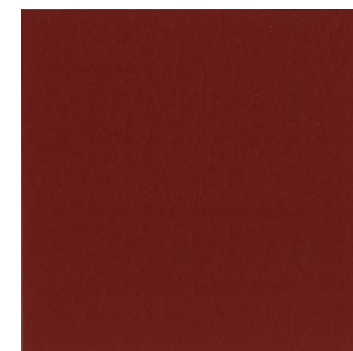


Red



Lime

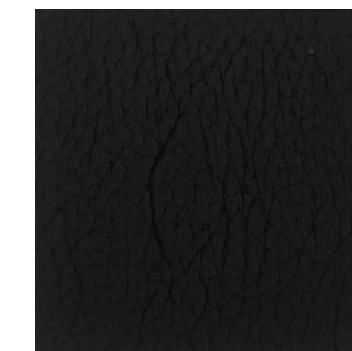


299

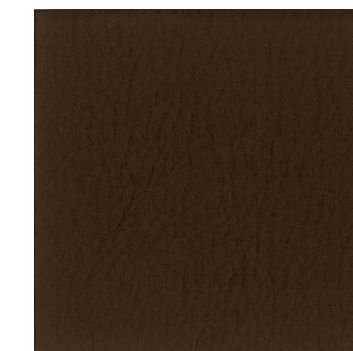


115




650

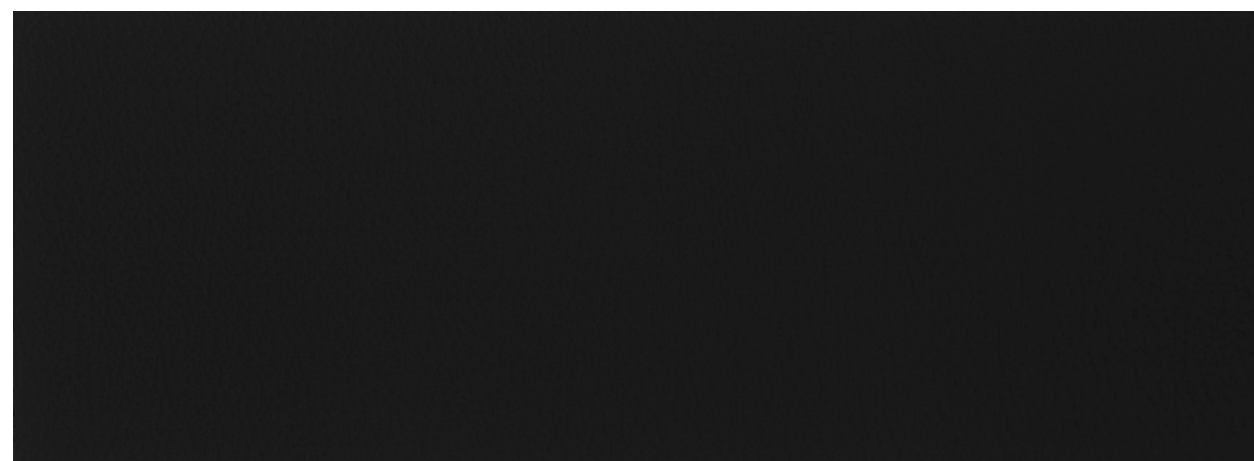

Nero

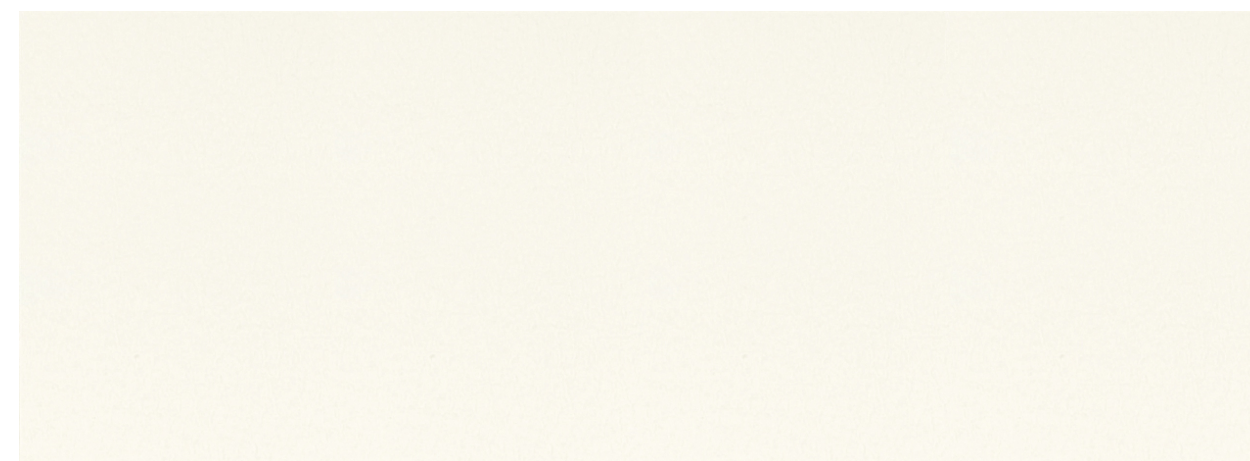

Bianco

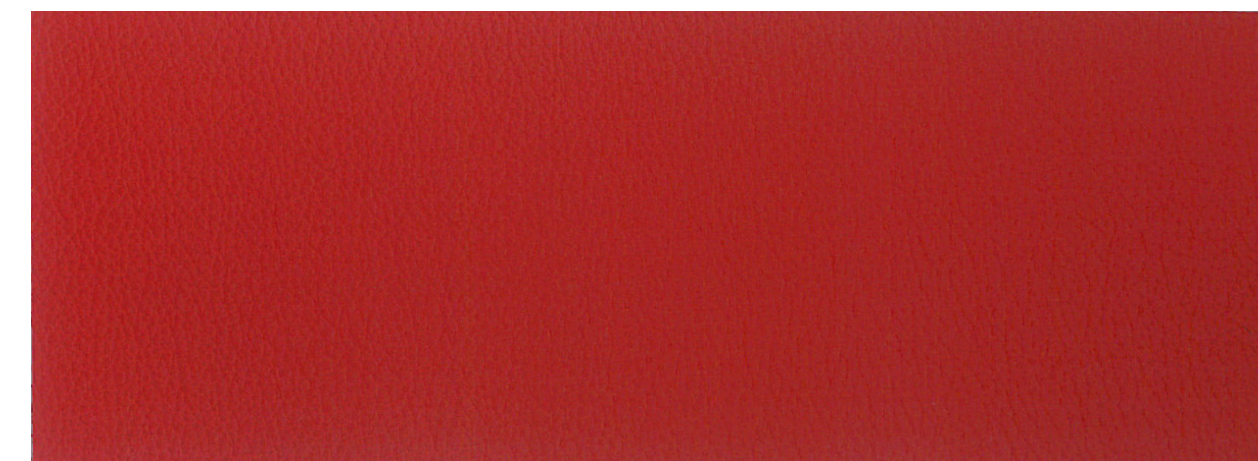

226

Sem

Description	Omschrijving	Description	Beschreibung
leather	runderleer	cuir	Rindsleder
Thickness: 0.9/1.0 mm	Dikte: 0.9/1.0 mm	Paisseur: 0.9/1.0 mm	Dicke: 0.9/1.0 mm
Tests Abrasion: App. >50.000 rubs acc. to Martindale Methode	Testgegevens Slijtvastheid: Ca. >50.000 toeren Martindale	Tests Résistance au brossage: Env. >50.000 tours Martindale	Prüfungsergebnisse Scheurfestigkeit: Ca. >50.000 Scheuerhübe gemäss der Martindale Methode
Colour fastness: (ISO) 5	Kleurechtheid: (ISO) 5	Inaltérabilité des couleurs: (ISO) 5 Inaltérabilité au frotte- ment: (ISO) sec 5 / mouillé 5	Lichtechtheit: (ISO) 5
Colour fastness to rub- bing: (ISO) dry 5 / wet 5	Wrijftechtheid: (ISO) droog 5 / nat 5		Reibechtheit: (ISO) trocken 5 / nass 5
Flame resistance: BS 5852-1	Brandvrijheid: BS 5852-1	Normes au feu: BS 5852-1	Flammschutz: BS 5852-1

Tolo

Description	Omschrijving	Description	Beschreibung
leather	runderleer	cuir	Rindsleder
Thickness: 1.0/1.3 mm	Dikte: 1.0/1.3 mm	Paisseur: 1.0/1.3 mm	Dicke: 1.0/1.3 mm
Tests Abrasion: App. >50.000 rubs acc. to Martindale Methode	Testgegevens Slijtvastheid: Ca. >50.000 toeren Martindale	Tests Résistance au brossage: Env. >50.000 tours Martindale	Prüfungsergebnisse Scheurfestigkeit: Ca. >50.000 Scheuerhübe gemäss der Martindale Methode
Colour fastness: (ISO) 5	Kleurechtheid: (ISO) 5	Inaltérabilité des couleurs: (ISO) 5 Inaltérabilité au	Lichtechtheit: (ISO) 5
Colour fastness to rub- bing: (ISO) dry 5 / wet 5	Wrijftechtheid: (ISO) droog 5 / nat 5	frottement: (ISO) sec 5 / mouillé 5	Reibechtheit: (ISO) trocken 5 / nass 5
Flame resistance: BS 5852-1	Brandvrijheid: BS 5852-1	Normes au feu: BS 5852-1	Flammschutz: BS 5852-1

Fiori

Description	Omschrijving	Description	Beschreibung
Semi aniline leather	Semi aniline leder	Cuir semi aniline	Semianilinleder
Thickness: 1.1 mm	Dikte: 1.1 mm	Paisseur: 1.1 mm	Dicke: 1.1 mm
Tests Abrasion: App. >50.000 rubs acc. to Martindale Methode	Testgegevens Slijtvastheid: Ca. >50.000 toeren Martindale	Tests Résistance au brossage: Env. >50.000 tours Martindale	Prüfungsergebnisse Scheurfestigkeit: Ca. >50.000 Scheuerhübe gemäss der Martindale Methode
Colour fastness: (ISO) 3/4	Kleurechtheid: (ISO) 3/4	Inaltérabilité des couleurs: (ISO) 3/4 Inaltérabilité au	Lichtechtheit: (ISO) 3/4
Colour fastness to rub- bing: (ISO) dry 5 / wet 5	Wrijftechtheid: (ISO) droog 5 / nat 5	frottement: (ISO) sec 5 / mouillé 5	Reibechtheit: (ISO) trocken 5 / nass 5
Flame resistance: DIN ISO 1021 1/2 ISO 8191-1 BS 5852-1	Brandvrijheid: DIN ISO 1021 1/2 ISO 8191-1 BS 5852-1	Normes au feu: DIN ISO 1021 1/2 ISO 8191-1 BS 5852-1	Flammschutz: DIN ISO 1021 1/2 ISO 8191-1 BS 5852-1

premium
selection

Artifort • Lande

Sem • Tolo • Fiori

Lande Group

Lande Group